

XO5503-125MHz e-Vibe® Compensated OCXO

Features	Applications
Frequency: 125MHz Vibration Compensated Low Phase Noise Low Aging	Radar Satcom Electronic Warfare Munitions

Electrical Specifications at 125MHz

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Nominal Frequency	F ₀		125		MHz	

Frequency Stabilities

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Frequency Stability	$\Delta F/F$	-500		+500	ppb	Over the operating temperature range
vs. Supply Voltage variation		-15		+15	ppb	±5% change in V
vs. Load Change		-100		+100	ppb	
Aging (After 30-days power on)		-250 -200		+250 +200	ppb ppb	1 st year Per year after 1 st year

RF Output

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Output Type		Sinewave				
Output Level		+5	+7	+10	dBm	Into a nominal 50Ω load
Output Load			50		Ω	±5%
Harmonics				-30	dBc	

XO5503-125MHz e-Vibe® Compensated OCXO

Frequency Adjustment

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Adjustment Method		External Voltage				
Adjustment Voltage	V _{TUNE}	0		+5	V	
Adjustment Range			±2.5		ppm	
Input Impedance		25		kΩ		
Adjustment Slope		Positive				

Phase Noise

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
SSB Phase Noise (Under Static Conditions)				-84	dBc/Hz	10 Hz Offset
				-115	dBc/Hz	100 Hz Offset
				-145	dBc/Hz	1 kHz Offset
				-166	dBc/Hz	10 kHz Offset
				-170	dBc/Hz	100 kHz Offset
SSB Phase Noise – With Random Vibration (operational, any axis)				-81	dBc/Hz	10 Hz Offset
				-113	dBc/Hz	100 Hz Offset
				-142	dBc/Hz	1 kHz Offset
				-162	dBc/Hz	10 kHz Offset
				-169	dBc/Hz	100 kHz Offset

Random Vibration (operational)

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Power Spectral Density			0.01		g ² /Hz	10 Hz – 350 Hz
			0.0018			2000 Hz

Temperature, Supply Voltage & Power Consumption


Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Operating Temperature	OTR	-40		+85	°C	Full Specification Compliance
Operating Voltage	V _{CC}	+11.4	+12.0	+12.6	V	
Power Consumption				3	W	Steady state @ 25°C, In Still Air
				6	W	@ Start-up

XO5503-125MHz e-Vibe[®] Compensated OCXO

Marking information

Part Marking
Mtron
XO5503
125.000MHz
Serial Number
Date Code


Mechanical Outline

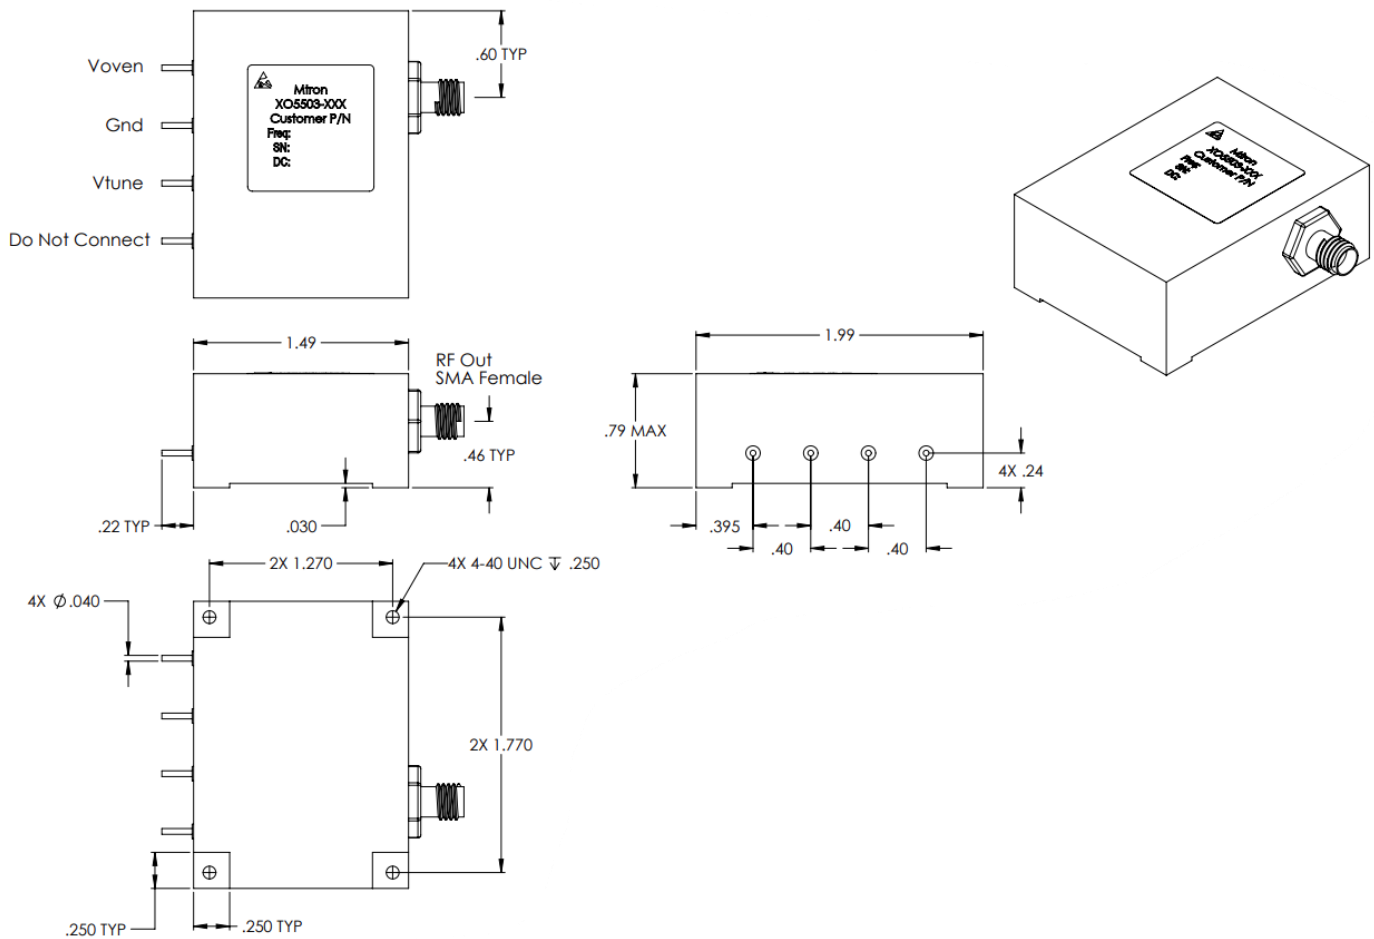

XO5503-125MHz e-Vibe[®] Compensated OCXO

Phase Noise Performance


Xaxis - pot=60 R20=215k

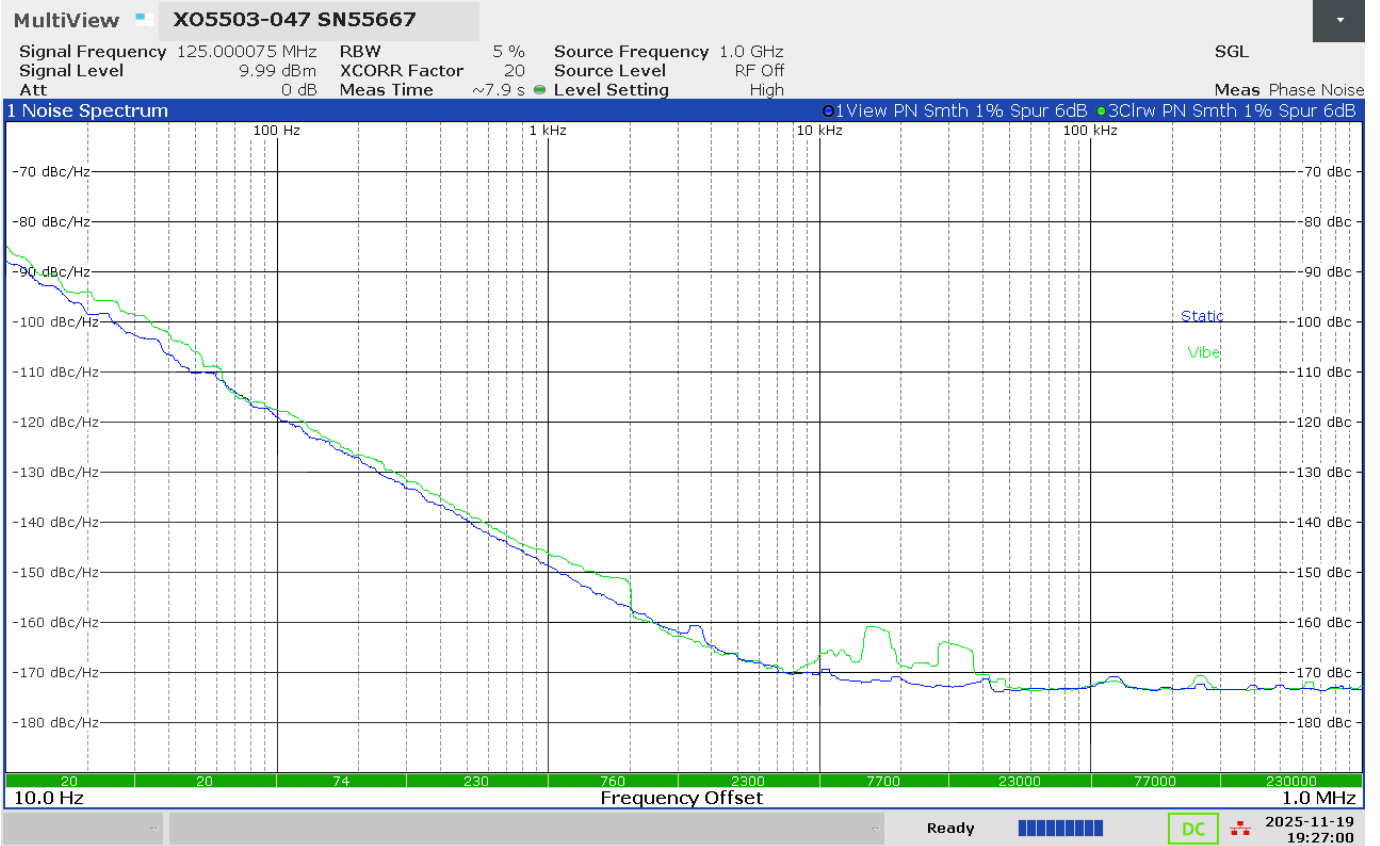

07:27:01 PM 11/19/2025

XO5503-125MHz e-Vibe[®] Compensated OCXO


Yaxis - pot=148 R40=13.3k

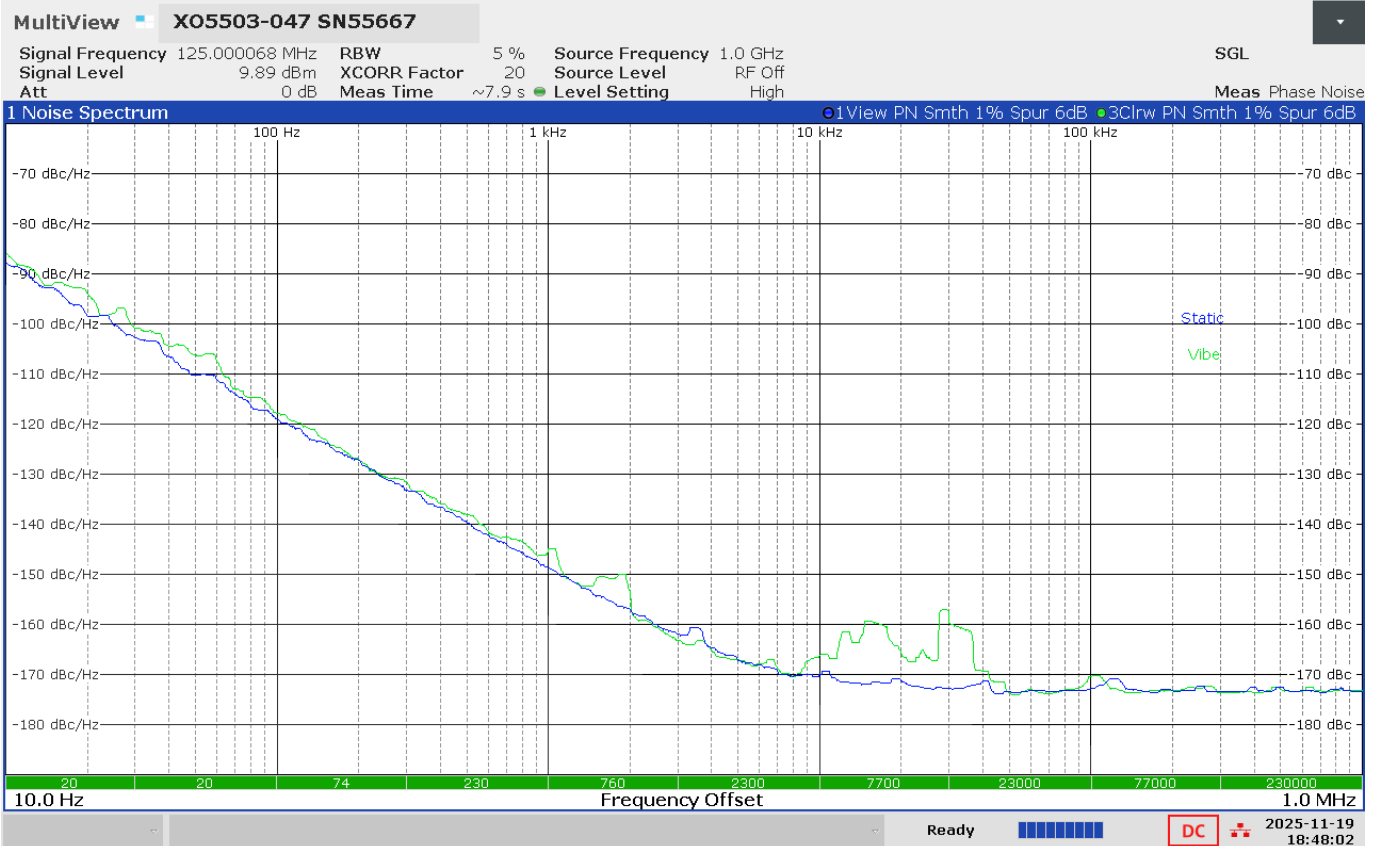

06:48:03 PM 11/19/2025

XO5503-125MHz e-Vibe[®] Compensated OCXO

Zaxis - pot=151 R60=35.7k

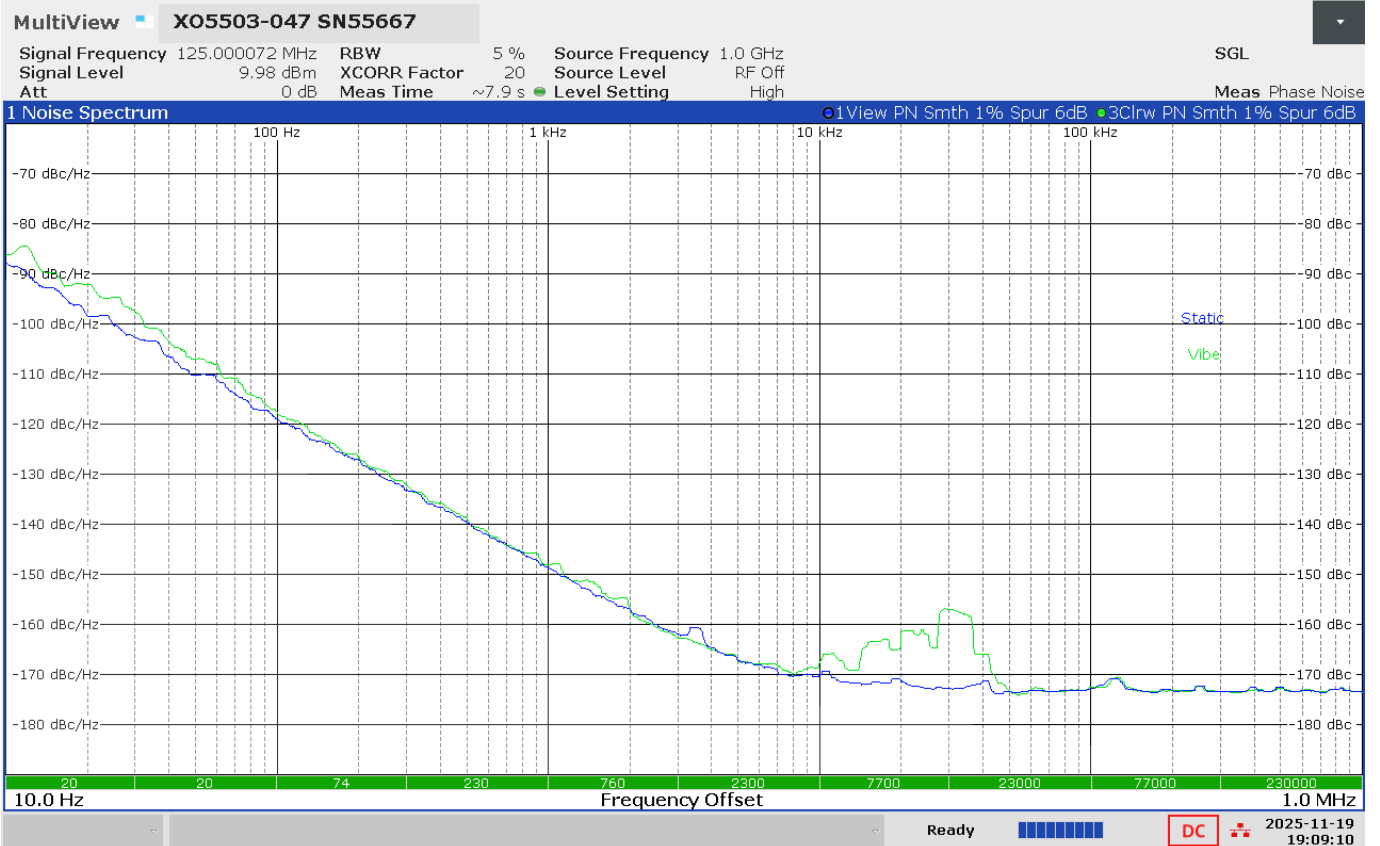

07:09:11 PM 11/19/2025