

PA2530-010 2.5 to 3GHz 10W Solid State Power Amplifier System

FEATURES

Small and light weight bench-top chassis
Class AB linear design
Instantaneous wide bandwidth
Suitable for all modulations standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	2.5 - 3.0 GHz	
Power Output	10 Watts Min	CW
Power Gain	40 dB Min	
Power Gain Flatness	2.0 dB p-p Max	
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	>30 dBc Typ	33dBm/Tone, $\Delta = 1\text{MHz}$
Harmonics	>20 dBc Typ	At rated Pout
Non Harmonics Spurious	60 dBc Min	Non Harmonics
Operating Voltage	100 - 240 VAC	
Power Consumption	90 Watt Max	At rated Pout
Max Input Power	+8 dBm	Without damage
Load VSWR Protection	$\infty : 1$	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	265 x 88 x 229 mm	Bench Top
Weight	8 kg.	
RF Connectors In/Out	Type-N Female	
AC Power / Interface Connector	IEC 60320-C14 / 9-Pin D-Sub	
Cooling	Built in Fan Cooling	
OPTIONAL: Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485, GPIB Interface	Remote Bluetooth application

Applications

Test and Measurement
Electronic Warfare
Radar
Broadband Jamming
Public Safety

Quality & Certifications

AS9100 Rev C
ISO9001:2008




MtronPTI SSHPA Products: <http://www.mtronpti.com>



Connect with MtronPTI
mtronpti.com

Orlando

2525 Shader Rd
Orlando, FL 32804 USA
Phone: 407-298-2000
Fax: 407-293-2979

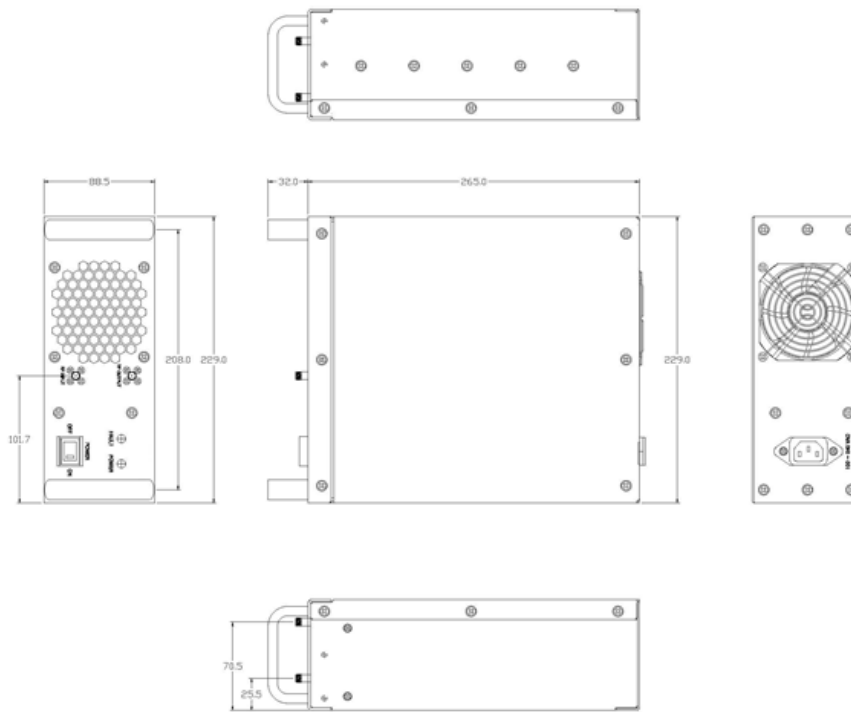

Experienced

MtronPTI continues nearly fifty years of service to aerospace, defense communication and control, Internet and mobile infrastructure, lab and field instrumentation EMs.

Vertically integrated

MtronPTI provides High reliability, High Power Solid State Power Amplifier solutions for demanding applications. Our design and manufacturing capabilities cover 50KHz to 47GHz frequency range with power levels of 1W to 4kW for CW & Pulse application modules and over 10kW for such systems. Synergy between our engineering manufacturing— from concept, simulation, electrical & mechanical layouts to assembly & testing capabilities allow for quick engineering & manufacturing responses to customer requests.

One-on-one technical relationships

Each project is unique in design, environmental, schedule and cost requirements. **MtronPTI** engineers work with your designers to select the best approach. Six sigma and AS9100 Rev C quality systems ensure reliable solutions.

Long term support

MtronPTI uses Rapid Process Feedback, Lean Manufacturing and Demand Flow Technology for right product, right time, on specification. **MtronPTI** also manages the supply chain: aligning forecasts, qualifying purchased component suppliers and working with distributors, hubs and portals to make sure every time the production line reaches for an **MtronPTI** part, it'll be there.

