


PA6018-100W- 6 to 18GHz 100W SSPA Module

FEATURES

High Power Linear GaN design
Instantaneous wide Bandwidth
Suitable for all single channel modulation standards
Built-in protection circuits
High reliability and ruggedness

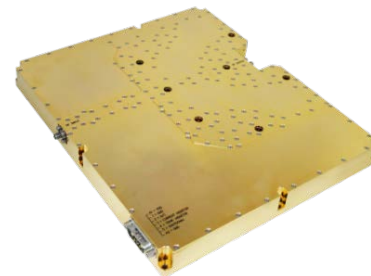

ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	6.0 - 18.0 GHz	
Power Output Past	100 Watt Typ	CW
Power Gain	50 dB Min	
Power Gain Flatness	5.0 dB p-p Max	
Input Return Loss	10 dB Min	
Harmonics	<-20 dBc Typ	At rated Pout
Spurious	-55 dBc Max	Non-harmonics
Noise Figure	12 dB Max	
Operating Voltage	32 VDC Nom	
Current Consumption	40 Amp Max	At rated Pout
Input Power Protection	+2 dBm Max	<10 Sec without damage
Load VSWR Protection	3 : 1	<1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-40 to +65 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensing

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	240 x 285 x 27 mm	Excluding connectors
Weight	10 Kg.	
RF Connectors In/Out	Hi Freq. SMA female	Cover Flange Glass Bead
DC Power / Interface Connector	7-Pin Hybrid D-Sub	
Cooling	External Heatsink	Forced air required

D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1		N/A
2		N/A
3	Current Sensor	$I_D @ 20mV/100mA$ Typ
4	Temp Sensor	$V_T @ 10mV/^{\circ}C + 500mV$ Typ
5	Shutdown	TTL
A1	VDD	32VDC
A2	GND	Ground

Applications

Test and Measurement
Electronic Warfare
Radar
Broadband Jamming
Public Safety

Quality & Certifications


AS9100 Rev C
ISO9001:2008
RoHS compliance
Conflict Minerals Compliant



MtronPTI SSHPA Products: <http://www.mtronpti.com>

Orlando

2525 Shader Rd
Orlando, FL 32804 USA
Phone: 407-298-2000
Fax: 407-293-2979

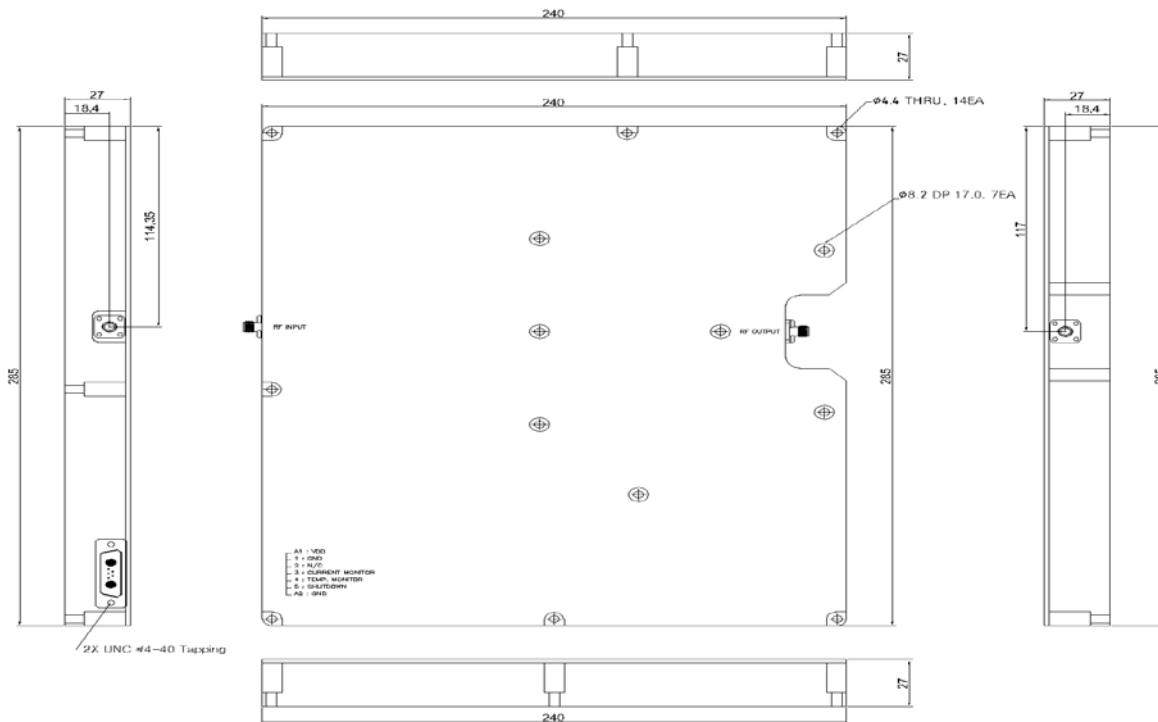

Experienced

MtronPTI continues nearly fifty years of service to aerospace, defense communication and control, Internet and mobile infrastructure, lab and field instrumentation EMs.

Vertically integrated

MtronPTI provides High reliability, High Power Solid State Power Amplifier solutions for demanding applications. Our design and manufacturing capabilities cover 50KHz to 47GHz frequency range with power levels of 1W to 4kW for CW & Pulse application modules and over 10kW for such systems. Synergy between our engineering manufacturing- from concept, simulation, electrical & mechanical layouts to assembly & testing capabilities allow for quick engineering & manufacturing responses to customer requests.

One-on-one technical relationships

Each project is unique in design, environmental, schedule and cost requirements. **MtronPTI** engineers work with your designers to select the best approach. Six sigma and AS9100 Rev C quality systems ensure reliable solutions.

Long term support

MtronPTI uses Rapid Process Feedback, Lean Manufacturing and Demand Flow Technology for right product, right time, on specification. **MtronPTI** also manages the supply chain: aligning forecasts, qualifying purchased component suppliers and working with distributors, hubs and portals to make sure every time the production line reaches for an **MtronPTI** part, it'll be there.

