




UFDX9999-002 C-Band Cavity Diplexer/Splitter Assembly

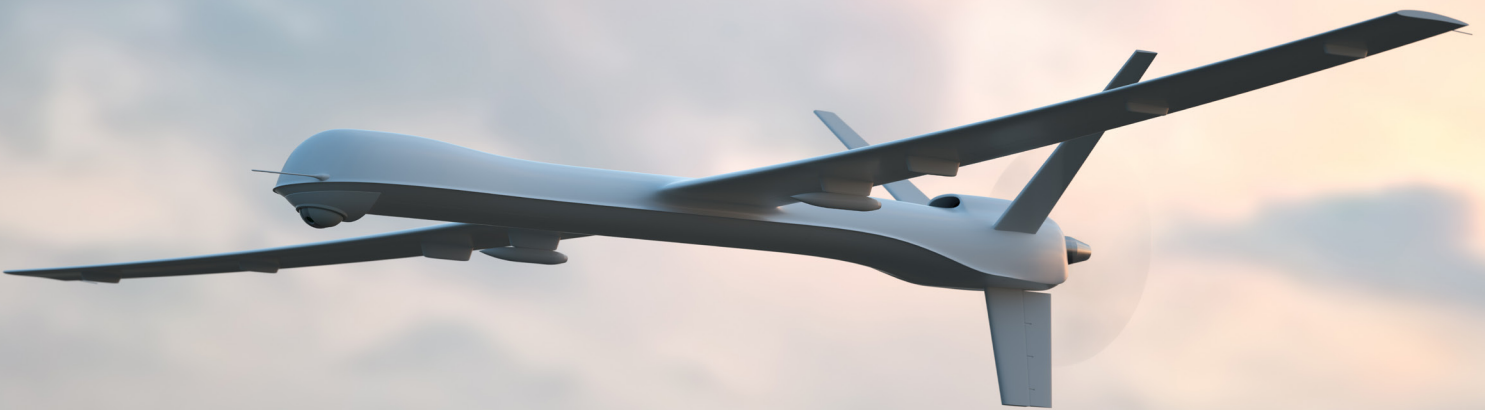

Mtron, a leader in reliable, mission-critical space filters has introduced the UFDX9999-002, a C-band Diplexer/Splitter Assembly that supports satellite applications such as the Golden Dome. An integrated diplexer/splitter enables a 25% reduction of the board space required. The Assembly incorporates highly selective bandpass filters and a splitter for full-duplex data transmission with low loss and outstanding isolation between the uplink and downlink bands. With a commitment to advancing defense capabilities, Mtron offers one of the industry's most comprehensive selection of RF filters.

The passbands, temperature range, and power handling can be customized for each application. The diplexer is compact, lightweight, and offers constant VSWR over temperature across bands. Mtron's products support rugged, high-performance communication links that require full-duplex operation in airborne, land, maritime and deep space applications.

Mtron offers a broad line of precision crystal resonators, oscillators, filters, and RF Solutions. Mtron is an ISO 9001:2015 and AS9100 Rev. D certified organization.

Features:



- Integrated assembly with splitter: Board Space Savings
- Excellent channel isolation of >70dB
- Low Insertion Loss – 4dB MAX including splitter loss
- Small Size, Low weight
- Custom operating temperatures available

Applications:

- Unmanned Aircraft System (UAS)
- SATCOM
- Electronic Warfare Datalink
- Deep Space Satellite Communication Link



Operational Bandwidths	Uplink Band = 6670-7070MHz Downlink Band = 7320-7920 MHz
Insertion Loss	4dB maximum; Includes splitter loss
Passband Ripple	0.1 dB max
Rejection: 5000 to 5800MHz and 9000 to 12000MHz	≥ 50dB
Power Handling	10W CW RF power
Duplexer Isolation	≥70dB
Power Divider Isolation	≥ 25dB
VSWR	1.45 max
Phase Balance	6 degrees max.
Weight	0.4kg max
Dimensions	3.8" (W) x 2.5" (L) x 1.25" (H) max.
External Surfaces	Nickel Plated.
Mounting Provisions	Supports custom provisions.
Coplanarity of bottom surface	0.010 inches max.
RF Connectors	Female SMA.

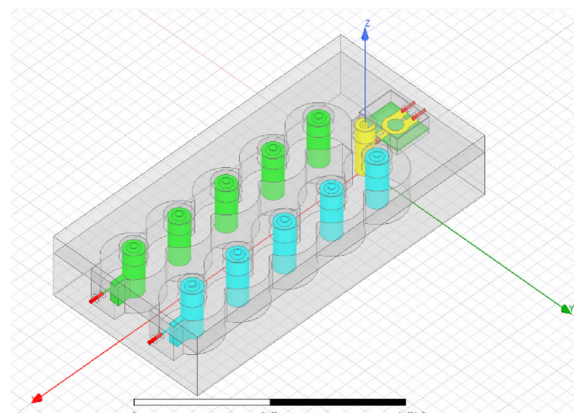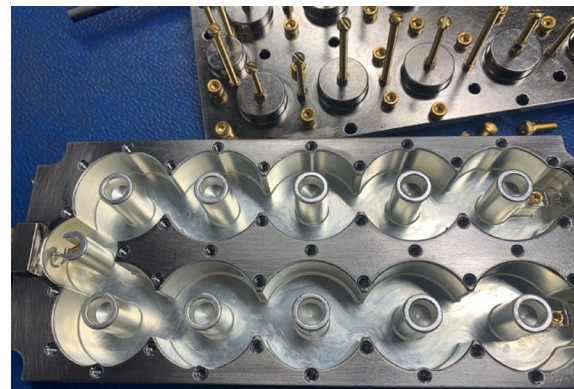

C-Band Diplexer/Splitter Assembly Representative Simulations

